

# FastenMaster® GuardDog®

Mastering the Tough Fastening Jobs!


## THE NEW PRESSURE TREATED DECK SCREW

**THE NEW ACQ SCREW. FULLY TESTED. FULLY GUARANTEED.**

Introducing the first fastener engineered for the increased copper levels found in the new ACQ and Copper Azole pressure treated decking.

The design features of this FastenMaster product include:

- Coated with Copperite: The Copper Stopper.
- Guaranteed corrosion resistance.
- Color matched to blend in with the new pressure treated decking.
- Sharp threads quickly penetrate lumber.
- Deep #2 square drive virtually eliminates cam-out during installation.
- Free driver bit included.

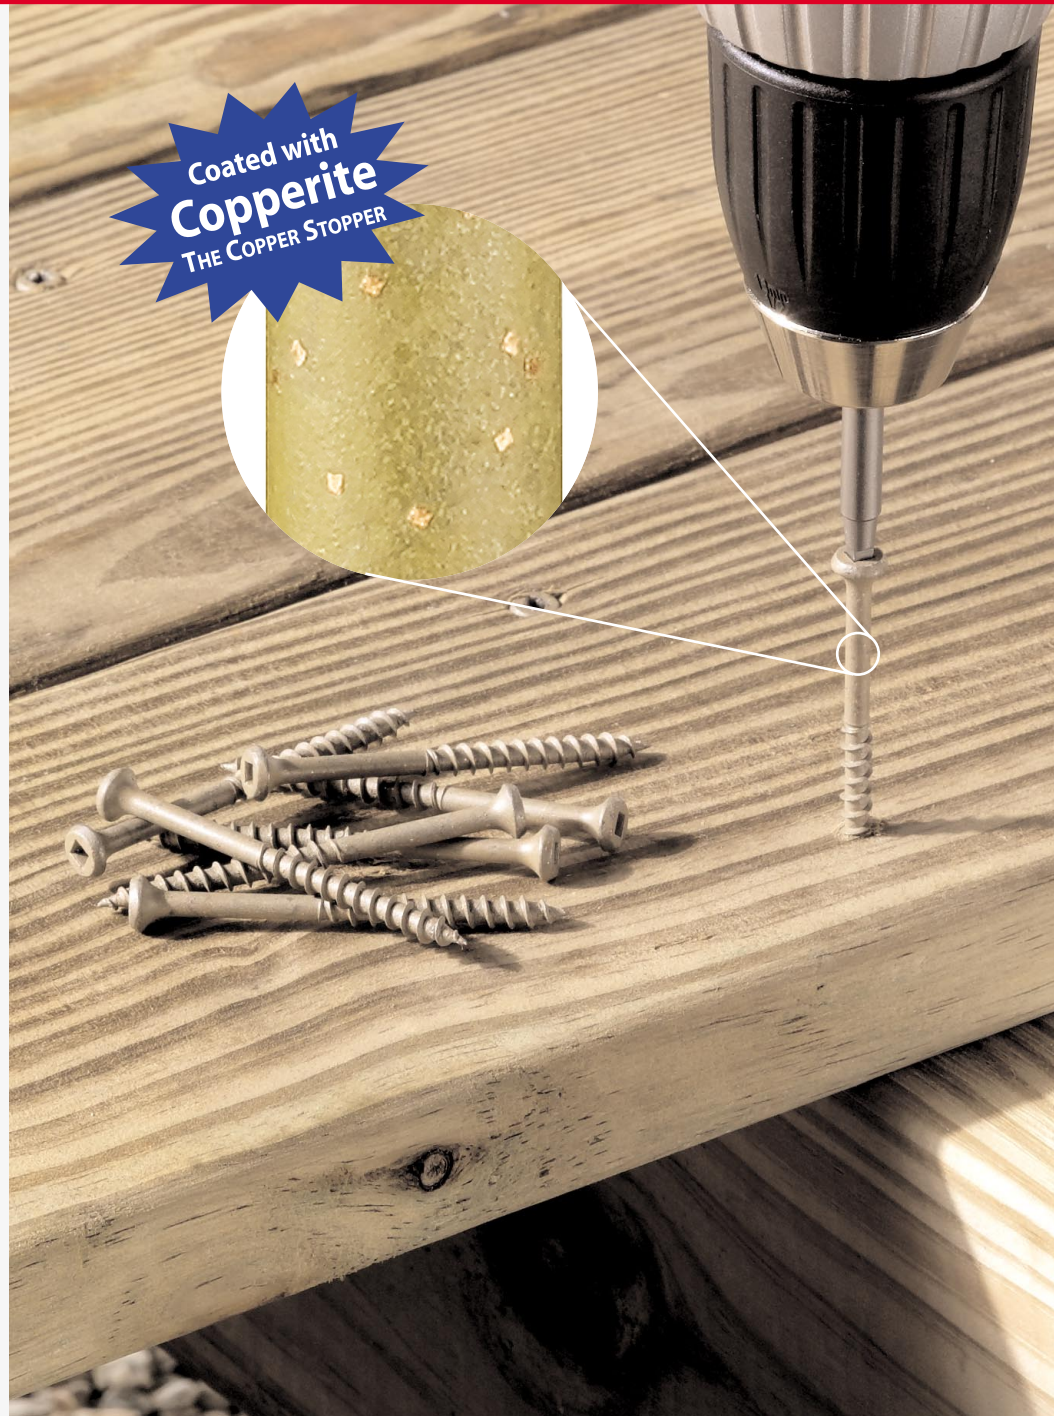

**For more information or free samples,  
call FastenMaster at 800•518•3569.**

**Fasten Master** **GuardDog**  
Mastering the Tough Fastening Jobs!  
**PRESSURE TREATED DECK SCREW**

**INSTALLATION PROCEDURE**

Use a 0-1800 RPM variable speed drill (at least 14.4V if cordless). Use the #2 square driver bits provided. Install fastener perpendicular to deck, increasing drill speed as the screw threads into the deck. Drive the screw flush. Do not overdrive. If cam-out occurs, remove and replace screw.

**Copperite Coating: The Copper Stopper**

Our patent pending coating has been developed to address the specific corrosive qualities found in the new P.T. lumbers (lumbers treated with ACQ and Copper Azole chemicals). Both of these pressure treating chemicals contain copper, an element which can increase red rust and corrosion when it comes in contact with traditionally coated deck screws. Copperite coating has undergone extensive testing with the new pressure treated lumbers and is guaranteed to protect against rusting for the life of the project.

You know your fastener is coated with Copperite when you see our proprietary copper-fleck topcoat.


Note: Corrosion guarantee does not apply when the fastener is used in a salt water application or on cedar decking.

DEEP # 2 SQUARE DRIVE

COPPERITE COATING FOR GUARANTEED CORROSION RESISTANCE

AGGRESSIVE THREAD DESIGN FOR INCREASED HOLDING POWER

SHARP PIERCING POINT FOR FAST INSTALLATION

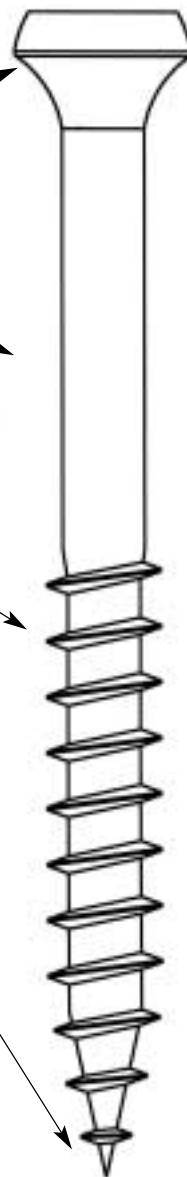

Part Number	Screw Length	Qty. per Box	Sq. Ft. of Deck*
FMGD158-75	1 5/8"	75	20
FMGD158-350	1 5/8"	350	100
FMGD158-1750	1 5/8"	1750	500
FMGD002-75	2"	75	20
FMGD002-350	2"	350	100
FMGD002-1750	2"	1750	500
FMGD212-75	2 1/2"	75	20
FMGD212-350	2 1/2"	350	100
FMGD212-1750	2 1/2"	1750	500
FMGD003-75	3"	75	20
FMGD003-350	3"	350	100
FMGD003-1750	3"	1750	500
FMGD312-75	3 1/2"	75	20
FMGD312-350	3 1/2"	350	100
FMGD312-1750	3 1/2"	1750	500

\*Based on a fastening pattern of 2 screws per joist, spaced every 16", into standard 6" wide decking

BPO3049-10W-AML